



Department of Public Works 10455 Armstrong Street Fairfax, VA 22030-3630


CITY of FAIRFAX

USE WITH THE FAIRFAX STANDARD SPECIFICATIONS ONLY

Voice (703) 246-6330 FAX (703) 591-5727 www.fairfaxva.gov

MULTI-STEM TREE PLANTING and STAKING DETAIL

SCALE:	DETAIL#
Not To Scale	2921.02
REVISION DATE:	SHEET #:
July, 2005	1 of 2

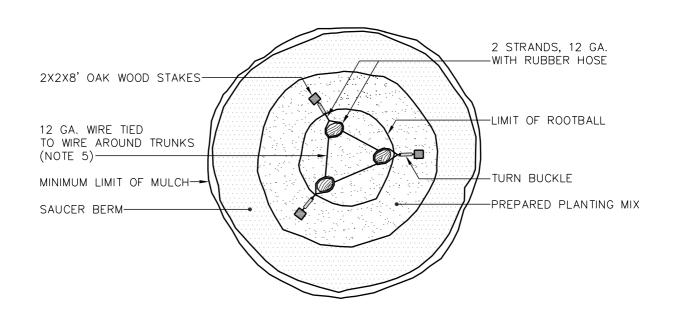

NOTES:

- 1. Remove all treated or plastic-coated burlap, strapping, wire or nylon twine from root ball. After setting in hole, cut away top and sides of wire basket, if any.

 2. Install top of plant ball even with or 1" above existing grade.
- 3. Soak plant ball and pit immediately after installation. Place 4-6" of seasoned mulch or pine needles around base of tree, 3' diameter minimum.
- 4. Wrap trees from ground to lowest branches with burlap or tree wrap paper (optional). Secure near top and bottom with hemp string only.
- 5. Tree bracing straps are optional, use polypropylene webbing only no wire or rope to be in contact with trunk. Remove all tree straps and trunk wrap after one growing season.



Department of Public Works 10455 Armstrong Street Fairfax, VA 22030-3630

CITY of FAIRFAX

USE WITH THE FAIRFAX STANDARD SPECIFICATIONS ONLY

Voice (703) 246-6330 FAX (703) 591-5727 www.fairfaxva.gov

MULTI-STEM TREE PLANTING and STAKING DETAIL

SCALE:	DETAIL#
Not To Scale	2921.02
REVISION DATE:	SHEET #: